



KLR-Series Amplifiers

KLR 2000, KLR 3200, KLR 4000, KLR 5000

Operator Manual



Ashly Audio

847 Holt Road, Webster, NY 14580-9103

Toll Free (800) 828-6308, phone (585) 872-0010, FAX (585) 872-0739
ashly.com

Important Safety
Instructions - 2

Introduction - 3

The KLR Series - 4

Physical Description - 5

Installation - 6

Troubleshooting - 10

Spec Table - 11

Warranty - 12

This manual uses a *Perpetual Table Of Contents*. Each page has a copy of the manual's contents in a gray box just like this one. The section you are in will always be bold with the other sections "grayed out." The feature allows you to jump directly to another section without having to return to a Table Of Contents page.

Important Safety Instructions

Consignes de sécurité à lire attentivement

This power amplifier can produce dangerous output voltage, power and sound pressure levels. In order to minimize the risk of injury, damage, or hearing loss, please read the entire owner's manual.

Cet amplificateur de puissance peut produire un voltage et une pression acoustique qui pourrait être dangereuse ou pourrait même causer des problèmes ou perte d'acuité auditive. Consultez le manuel d'instruction et observez les consignes.



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons. The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance instructions in the literature accompanying the device.

Le symbole de la flèche dans un triangle équilatéral symbolisant la foudre est prévu pour sensibiliser l'utilisateur à la présence de tension de voltage non isolée à l'intérieur de l'appareil. Elle pourrait constituer un danger de risque de décharge électrique pour les utilisateurs. Le point d'exclamation dans le triangle équilatéral alerte l'utilisateur de la présence de consignes qu'il doit d'abord consulter avant d'utiliser l'appareil.

1. Read these instructions.
 2. Keep these instructions.
 3. Heed all warnings.
 4. Follow all instructions.
 5. To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.
 6. Do not use this apparatus near water.
 7. Clean only with dry cloth.
 8. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
 9. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
 10. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
 11. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
 12. Only use attachments/accessories specified by the manufacturer.
 13. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
 14. Unplug this apparatus during lightning storms or when unused for long periods of time.
 15. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
 16. To completely disconnect this apparatus from the AC mains, disconnect the power supply cord plug from the AC receptacle.
 17. The mains plug of the power supply cord shall remain readily accessible.
1. Lisez ces instructions.
 2. Conservez ces instructions.
 3. Observez les avertissements.
 4. Suivez ces instructions.
 5. Pour réduire le risque de feu ou la décharge électrique, ne pas exposer cet appareil pour pleuvroir ou l'humidité. Ne pas utiliser l'appareil près de l'eau.
 7. Le nettoyer à l'aide d'un tissu sec.
 8. Ne pas bloquer les ouvertures de ventilation, installer selon les consignes du fabricant.
 9. Eloigner des sources de chaleur tel: radiateurs, fourneaux ou autres appareils qui produisent de la chaleur.
 10. Ne pas modifier ou amputer le système de la mise à terre. Une prise avec mise à terre comprend deux lames dont une plus large ainsi qu'une mise à terre: ne pas la couper ou la modifier. Si la prise murale n'accepte pas la fiche, consulter un électricien pour qu'il remplace la prise défectueuse.
 11. Protéger le cordon de secteur contre tous bris ou pincement qui pourraient l'endommager, soit à la fiche murale ou à l'appareil.
 12. N'employer que les accessoires recommandés par le fabricant.
 13. N'utiliser qu'avec les systèmes de fixation, chariots, trépied ou autres, approuvés par le fabricant ou vendus avec l'appareil.
 14. Débrancher l'appareil lors des orages électriques ou si inutilisé pendant une longue période de temps.
 15. Un entretien effectué par un centre de service accrédité est exigé si l'appareil a été endommagé de quelque façon: si il a été exposé à la pluie, l'humidité ou s'il ne fonctionne pas normalement ou qu'il a été échappé.
 16. Pour déconnecter complètement cet appareil de l'alimentation secteur, débrancher la fiche de la prise de courant CA du cordon d'alimentation.
 17. La fiche du cordon d'alimentation doit rester facilement accessible.

Introduction

Congratulations on your purchase of an Ashly KLR-Series amplifier. The KLR-Series is made up of powerful, high-efficiency, lightweight amplifiers incorporating the latest technologies. We are confident that you will be pleased with the high performance, superb sound quality, reliability, and more.

About Ashly

Ashly Audio was founded in 1974 by a group of recording engineers, concert sound professionals, and electronics designers. The first products were elaborate custom consoles for friends and associates, but business quickly spread to new clients and the business grew. The philosophy we established from the very beginning holds true today: to offer only the highest quality audio tools at an affordable cost to the professional user – ensuring reliability and long life. More than thirty years later, Ashly remains committed to these principles.

FCC Compliance

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference
2. This device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in both a commercial and residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Important Safety
Instructions - 2

Introduction - 3
About Ashly
FCC Compliance

The KLR Series - 4

Physical Description - 5

Installation - 6

Troubleshooting - 10

Spec Table - 11

Warranty - 12

Important Safety
Instructions – 2

Introduction - 3

The KLR Series - 4
Protection

Physical Description - 5

Installation - 6

Troubleshooting - 10

Spec Table - 11

Warranty - 12

The KLR Series

KLR-Series amplifiers are high-efficiency, lightweight high power amplifiers incorporating the latest amplifier technologies.

The series provides a power range of 1000 to 2500 watts per channel at 2 ohms (20Hz-20kHz, 1% THD). The KLR series is available in 2 channel versions at four power points. All models will drive 2, 4, or 8 ohm loads.

*The KLR 3200 can also be used as a two channel 70V distributed output amplifier providing up to 800W per channel. For 70V applications, Ashly recommends setting the amplifier's HiPass filter switch to 50Hz (see page 5).

KLR-Series Power Ratings (per channel)					
Model	Stereo				Mono Bridged
	70V	8Ω	4Ω	2Ω	4Ω
KLR 2000	X	350W	600W	1000W	2000W
KLR 3200*	800W	650W	1100W	1600W	3200W
KLR 4000	X	850W	1400W	2000W	4000W
KLR 5000	X	1000W	1700W	2500W	5000W

- Inputs are via 3-pin Euroblock, XLR, and ¼" TRS connectors.
- Switch mode power supply provides high efficiency and low weight
- Output connectors are four pin Speakon type.
- Rear panel switches include: Gain and Operation Mode, Limiter, and HPF.
- Forced air cooled (front panel intake, rear panel exhaust)
- Front panel indicators for output level, clip/protect, and power on/off
- Gain selectable switch for both channels
- Removable dust filters on front panel
- Rack ears for permanent installation in a standard 2RU 19"(rack mount width) enclosure

Protection

KLR-Series Amplifiers come standard with several protection circuits:

- ✓ **Output over-current protection**
- ✓ **DC output protection**
- ✓ **Chassis internal temperature monitoring**
- ✓ **Inrush limiting**
- ✓ **Mains circuit breaker (*Mains fuse used in KLR-5000*)**

WARNING: Do not remove the mains connector ground.

Physical Description


Each model in the KLR-Series is 2RU. The model number is indicated on the left side of the front panel

Amplifier Front Panel



- 1. Mounting Holes** – For rack mounting.
- 2. Air Inflow Vents** – Cool air enters here.
- 3. Channel Attenuators** – These knobs adjust the attenuation of the input signal of each channel from ∞ to 0.
- 4. Signal, Clip, and Protect LEDs** – Indicates output level of -30, -20, -10dB, Clip, and amplifier protect.
- 5. Power Switch and LED** – Switches the unit on or off. The KLR 2000, KLR 3200, and KLR 4000 use a switch with a built in mains circuit-breaker. The KLR 5000 uses a non-breaker switch and an internal mains fuse instead.
- 6. Rack Handles** – Handles on newer models can be removed using a 3mm hex wrench.

Amplifier Rear Panel *(Note: KLR 5000 rear panel has different feature locations)*

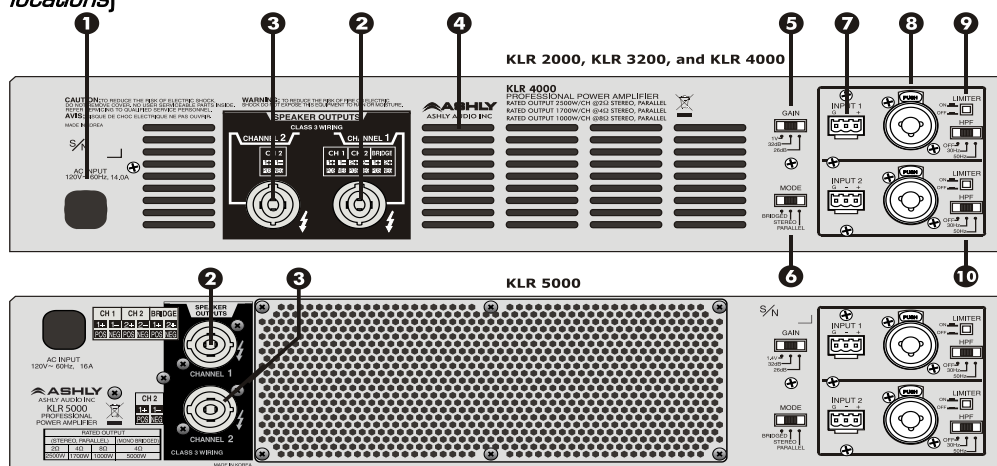

- 1. AC Cord** – For connection to the AC mains
- 2. CH 1, CH 2, Bridged Output Connector** – This connector provides the amplifier's Channel 1, channel 1 and 2, or bridged output.
- 3. CH 2 Output Connector** – This connector provides the amplifier's Channel 2 output.
- 4. Air Outflow Vents** – Warm air exits here.
- 5. Gain Switch** – The Gain switch sets the gain for both channels. Gain selections vary between models. Check specifications for each model.
- 6. Mode Switch** – This switch selects the amplifier's operating mode (Bridge, Stereo, or Parallel Mono).
- 7. 3-Pin Euroblock Input Connectors** – These connectors are used for balanced or unbalanced input signals. For parallel mode or bridged mode, use INPUT 1 only.
- 8. Combination XLR, 1/4" TRS Input Connectors** – These connectors are used for balanced or unbalanced input signals, and are wired in parallel with the Euroblock connector.
- 9. Limiter Switch** – This switch engages the limiter. There is a separate limiter for each channel.
- 10. HPF Switch** – This switch selects the input HiPass filter to 30Hz, 50Hz, or Off.

Important Safety
Instructions – 2

Introduction - 3

The KLR Series - 4

Physical Description - 5
Front Panel
Rear Panel

Installation - 6

Troubleshooting - 10

Spec Table - 11

Warranty - 12

Important Safety
Instructions – 2

Introduction - 3

The KLR Series - 4

Physical Description - 5

Front Panel

Rear Panel

Installation – 6

Requirements

Installation Density

Typical Applications

Connectors & Polarity

Speaker Connections

Troubleshooting - 10

Spec Table - 11

Warranty - 12

Installation

KLR-Series amplifiers are designed for use in both fixed and mobile sound systems. Each amplifier is shipped (unless otherwise specified) with the following factory settings:

Front panel:	Rear panel:
On/Off Switch = Off Attenuators = ∞	High Pass Filter(s) = Off Gain Selector = Max Gain Position Mode Selector = Stereo Limiter Switch = Off

Before connecting to mains power, make sure that the switches are set to the configuration needed for your particular application. Always switch the amplifier off before making any changes to the settings. Failure to do so could result in damage to the unit or other components in your system. **CAUTION:** When mounting or connecting the amplifier, always disconnect it from the mains. Use four screws and washers when mounting the amplifier to the front rack rails. Rear support is also recommended, especially for mobile or touring use. To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.


Requirements

KLR-Series amplifiers have specific physical, electrical and signal requirements for proper operation. These requirements will vary depending on your specific application, setup, and the settings on the amplifier. When setting up and testing your system, please take special care to double check all connections and settings. Please refer to the specifications section of this manual for specific input, output and other figures.

Installation Density

KLR-Series amplifiers produce substantial power output from a small chassis. When driven at the higher-end of their potential, they do produce heat that must be dissipated. In cases where multiple KLR amplifiers are mounted together (or a single KLR with other equipment), it is recommended that a 1RU space is left between units to allow for proper air circulation. If the amplifier overheats, it will go into 'thermal' protect mode to prevent damage to itself and any connected components and speakers.

KLR Dimensions

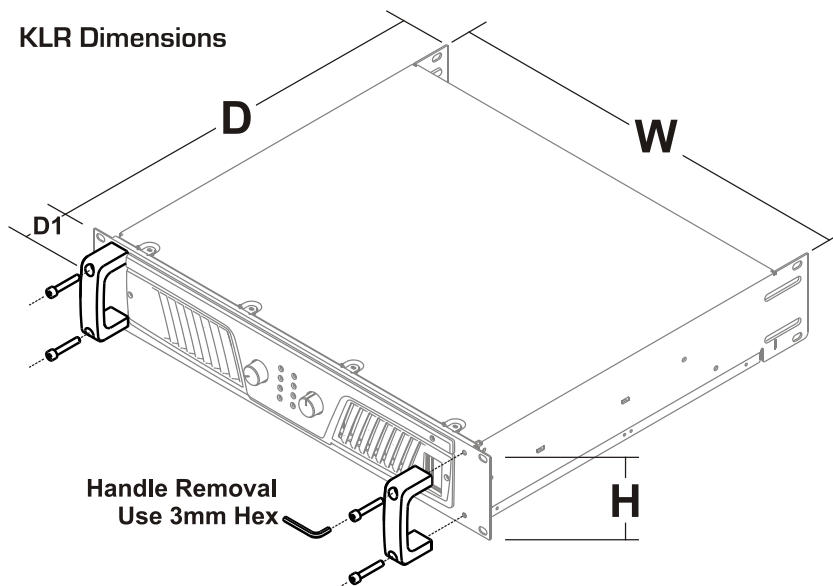

H = 3.47" (88.1mm)
W = 17.6" (447mm)
D = 16.0" (406mm)
D1 = 1.5" (38.1mm)

Important Safety
Instructions – 2

Introduction - 3

The KLR Series - 4

Physical Description - 5

Installation – 6

Requirements

Installation Density

Typical Applications

Connectors & Polarity

Speaker Connections


Troubleshooting - 10

Spec Table - 11


Warranty - 12

Connectors & Polarity

KLR-Series amplifiers utilize three types of professional audio connectors. For the inputs, 3-pin Euroblock connectors are utilized with their polarity clearly marked on the amplifier's rear panel, and combination XLR and 1/4" phone jack are all wired in parallel. Outputs are four pin Speakon type connectors. The polarity for these connections is marked on the unit's chassis. Note that polarity changes when the unit is operated in BRIDGED mode. Be sure to read the Operation section of this manual for important information on the operating modes.

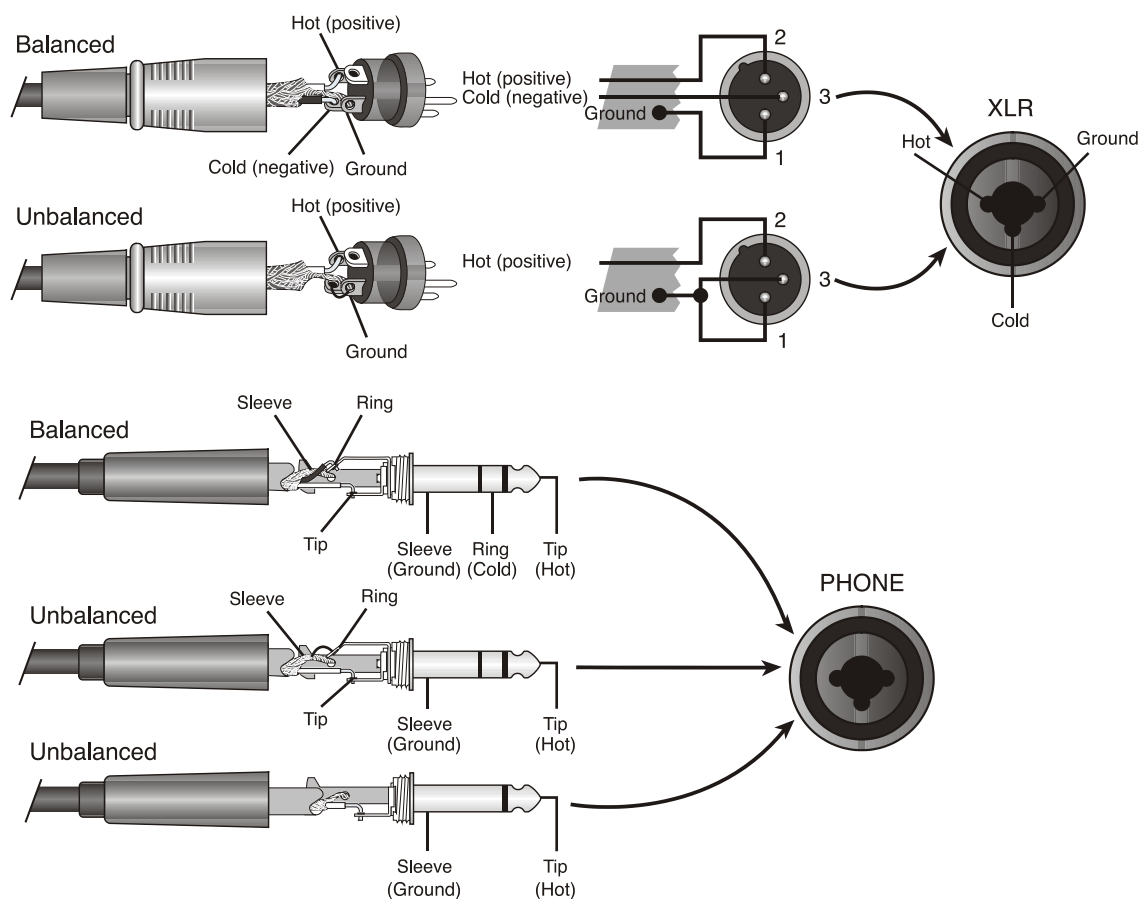


Speaker Connections *(Note: KLR 5000 speaker outputs not shown – see page 5)*

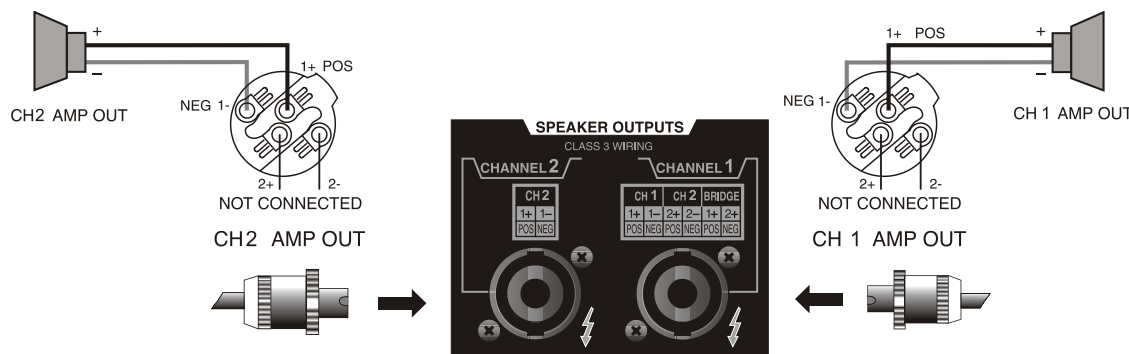


Stereo Speaker Wiring

In this mode, the amplifier's channels operate fully independent of each other. Each signal enters the unit and is amplified separately and wired using different connectors.

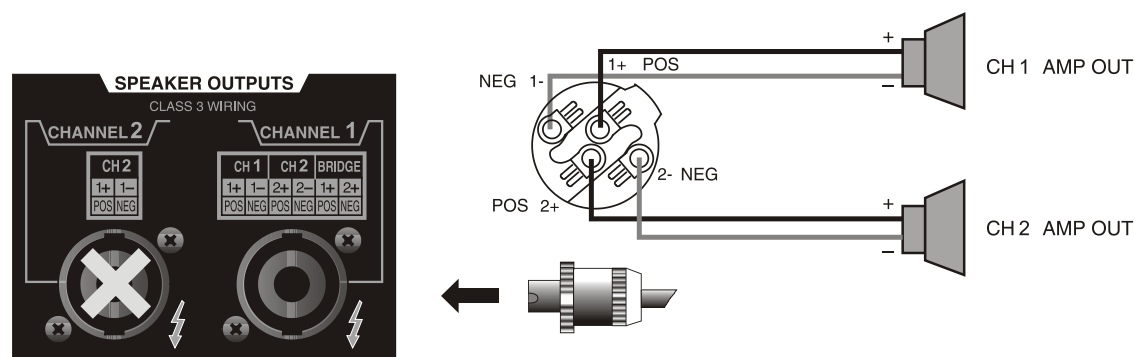

Stereo Speaker Wiring Using Single 4-Conductor Speaker Cable

In this mode, the amplifier's channels still operate independent of each other. Each signal is amplified separately, however both channels are wired using the Channel 1 connector.

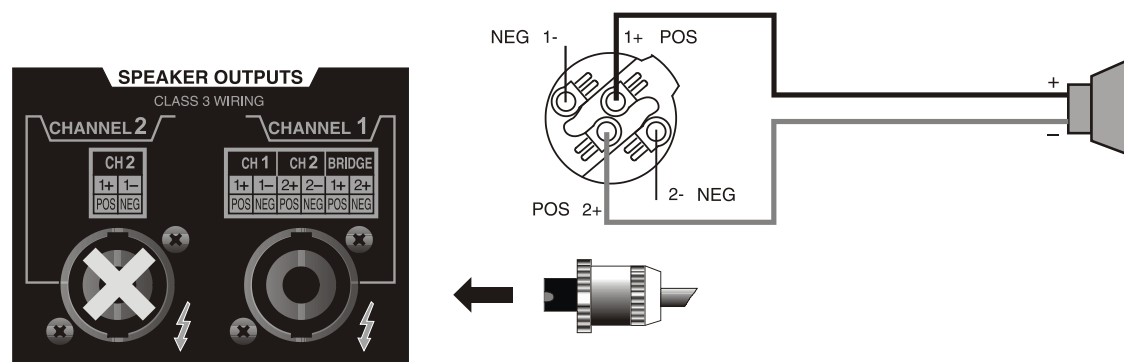

Bridged (Mono) Mode

In this mode, a single input is connected to channel 1 and is connected to the two output channels that have been "Bridged" together using the Channel 1 connector. Minimum Bridged load impedance is 4Ω.

Important Safety Instructions – 2
Introduction - 3
The KLR Series - 4
Physical Description - 5
Installation – 6
Requirements
Installation Density
Typical Applications
Connectors & Polarity
Speaker Connections
Troubleshooting - 10
Spec Table - 11
Warranty - 12

Important Safety
Instructions – 2

Introduction - 3

The KLR Series - 4

Physical Description - 5

Installation – 6

Troubleshooting - 10

Spec Table - 11

Warranty - 12

Troubleshooting

Situation	Indication	Action
No Sound	Signal LED not lit Clip LEDs not lit	Check AC plug. Confirm that AC outlet works by plugging in another device.
	Signal LED not lit	Make sure the signal source is operating and try another cable. Check position of Volume Pots.
	Signal LEDs responding to signal level	Check the speaker wiring for breaks. Try another speaker and cable.
	Protect LED is lit	Overheating will cause protective muting. Check for proper ventilation.
No Channel Separation	No Channel Separation	Check the mode indicators on the back panel and make sure the mode selector on the rear panel is in the stereo position. Make sure other equipment in the signal path such as mixers and preamps are set for stereo, not mono
Distorted Sound	Power LED is lit	A faulty speaker or a loose connection could cause this. Check the wiring and try another speaker.
	Signal LEDs responding to signal level	The signal source might be clipping. Keep the volume pots at least halfway up so that the source does not have to be overdriven.
	Clip LEDs not lit	Keep the volume pots at least halfway up and try changing input sensitivity with the gain selector on the rear.
Hiss	Hiss	Unplug the amplifier input to confirm that the hiss is coming from the source or from a device upstream. Erratic or popping noises indicate an electronic fault in the offending unit. To keep the noise floor low, operate the primary signal source at full level, without clipping. Avoid boosting the signal further between the source and the amplifier.
Squeals and Feedback	Squeals and Feedback	Microphone feedback should be eliminated with mixer controls. If noise continues to build up with no microphone gain, there is a serious fault in the signal processors or cables. Working in succession from the signal source towards the amplifier and check each device in the signal path by reducing its gain or by unplugging it.

Specification Table

	KLR 2000	KLR 3200	KLR 4000	KLR 5000
Power Output Per Channel				
Stereo Mode, both channels driven				
8Ω, 20Hz - 20kHz, 1% THD	350W	650W	850W	1000W
4Ω, 20Hz - 20kHz, 1% THD	600W	1100W	1400W	1700W
2Ω, 20Hz - 20kHz, 1% THD	1000W	1600W	2000W	2500W
70V Output, 20Hz - 20kHz, 1% THD, per channel	X	800W	X	X
Bridged Mono Mode				
4Ω, 20 Hz - 20 kHz, 1% THD	2000W	3200W	4000W	5000W
Line Current Draw* (all channels driven @4Ω)				
Idle (120VAC 60Hz) *	0.99A	0.92A	1.05A	1.14A
1/8 th Power Pink Noise (120VAC 60Hz) *	9.7A	11.4A	14.0A	17.5A
1/3 Power Sine Wave (120VAC 60Hz) *	14.9A	16.6A	19.8A	24.7A
Thermal Dissipation (all channels driven @4Ω)				
Idle (BTU/hr)	164	136	171	215
1/8 th Power Pink Noise (BTU/hr)	1876	2063	2489	3111
1/3 Power Sine Wave (BTU/hr)	2880	3001	3516	4395
Input Gain Switch	1V, 26dB, 20dB	1V, 32dB, 26dB	1V, 32dB, 26dB	1.4V, 32B, 26dB
Signal to Noise Ratio (20Hz-20kHz, rated power @ 8Ω unweighted)	>108 dB	>109 dB	>109 dB	>110 dB
Output Circuitry:	Class AB	2 Step Class H	2 Step Class H	2 Step Class H
Frequency Response 1W @ 8Ω 20Hz-20kHz (-3dB down point)		+/- 0.3dB 5Hz – 70kHz		
Damping Factor – 100Hz @ rated power @8Ω		> 380		
THD 20Hz-20kHz, 10dB below rated output @4Ω		<0.05%		
Input Impedance		12 kΩ, balanced		
HPF (30Hz, 50Hz, Off)		12dB/Oct		
Amplifier Protection	Output Overcurrent, DC Output, Chassis Temperature, Mains Breaker (KLR-5000 uses Internal Mains Fuse Instead of Breaker)			
Cooling	Variable Speed Fan, Front to Rear Air Flow			
Front Panel Indicators	Prot/Clip, Signal, Power			
Attenuators	Per channel: front panel			
Input Connectors, each channel	3- Pin Euroblock, XLR, ¼" TRS Phone Jack			
Output connectors, each channel	Four pin Speakon type			
Operating Temperature/Humidity	Temperature: -10C - +40C / Humidity: 0% - 90%			
Power Cable Connector	3-Prong NEMA 5-15 (5-20 for KLR-5000)			
Dimensions	19" x 3.5" x 16" (482mm x 88mmx x407mm)			
Weight	24 lbs (10.9ka)	26.4 lbs (12ka)	26.7 lbs (12.1ka)	28.2 lbs (12.8ka)

* For 230VAC 50Hz models, divide Line Current Draw values by 2.

All Specifications Subject to Change or Improvement Without Notice.

Important Safety Instructions – 2

Introduction - 3

The KLR Series - 4

Physical Description - 5

Installation – 6

Troubleshooting - 10

Spec Table – 11

Warranty - 12

Important Safety
Instructions – 2

Introduction - 3

The KLR Series - 4

Physical Description - 5

Installation – 6

Troubleshooting - 10

Spec Table - 11

Warranty - 12

Ashly Audio Inc. LIMITED WARRANTY (USA ONLY)

For Customers outside of the United States, please contact the distributor or dealer from whom the unit was originally purchased. For units purchased in the USA, warranty service for this unit shall be provided by ASHLY AUDIO, INC. in accordance with the following warranty statement.

ASHLY AUDIO, INC. warrants to the owner of this product that it will be free from defects in workmanship and materials for a period of FIVE years from the original date of purchase, with the exception of certain touch-screen displays and motorized faders for which the warranty extends THREE years from the original date of purchase, and ONE year from the original date of purchase for Ashly EXP products.

Ashly Audio Inc. will, at its discretion and at no charge, either repair or replace any defective product or component upon prepaid delivery of the item to Ashly Audio Inc. service department. All warranty claims and returns of product must be accompanied by proof of the original date of purchase in the form of a valid sales receipt. This warranty confers specific legal rights, and additional rights pertaining to repair or replacement may vary by state.

WARRANTY EXCLUSIONS:

- 1) This warranty does not apply to damage resulting from misuse, neglect, improper installation, unauthorized modifications, or operation outside the product's intended use (failure to follow instructions in the operator's manual)
- 2) The warranty excludes defects or damages caused by external factors, including but not limited to accidents, environmental conditions, power surges or improper handling.
- 3) This warranty does not cover normal wear and tear, cosmetic damage, or consumable components that are expected to degrade over time.
- 4) The warranty does not extend to products that have been altered, repaired, or serviced by any party not authorized by the manufacturer.
- 5) Any damage arising from the use of incompatible accessories, attachments, or electrical supplies is excluded from coverage.
- 6) This warranty does not apply to equipment that has been subjected to installation related damage, improper storage, or transportation related impacts incurred during consumer-initiated transport after the product has been originally received.

This warranty is void if the serial number is altered, defaced, or removed. ASHLY AUDIO, INC. reserves the right to make changes in design, or make additions to, or improvements upon, this product without any obligation to install the same components as those installed on previously manufactured products.

Ashly Audio reserves the right to assess a fee for shipping and handling, should a product be determined non-defective upon completion of testing and thorough evaluation, regardless of warranty status.

Handling and storage fees will accrue on any product for which payment is not remitted within the required timeframe, in accordance with applicable state regulations.

In accordance with applicable state laws, any product deemed abandoned, left unclaimed, uncollected, or without customer response beyond the specified holding period may be used, sold or disposed of at the discretion of Ashly Audio. To the extent permitted by applicable state law any implied warranties, including the implied warranty of merchantability and the implied warranty of fitness for a particular purpose, are limited to the term of this written warranty. Some states do not allow limitations on the duration of implied warranties, so these limitations may not apply to you. Nothing in this warranty is intended to limit or exclude any rights or remedies available to the consumer under applicable state or federal warranty laws.

OBTAINING WARRANTY SERVICE INSIDE THE USA: For warranty service in the United States, please visit the Ashly website, or [click here](#).

OBTAINING WARRANTY SERVICE OUTSIDE THE USA: Please contact the authorized Ashly Distributor in your country. [Click here for a list of International Distributors](#).

Ashly Audio

847 Holt Road, Webster, NY 14580 • Phone 800-828-6308 • ashly.com

All rights reserved worldwide. All features, specifications, and graphical representations are subject to change or improvement without notice. All trademarks represented herein are the property of their respective owners.

An *exertis* | **JAM** business