


Unleashing Innovation

16 New Amplifiers | Unlimited Potential



FX 8 Channels

NEW

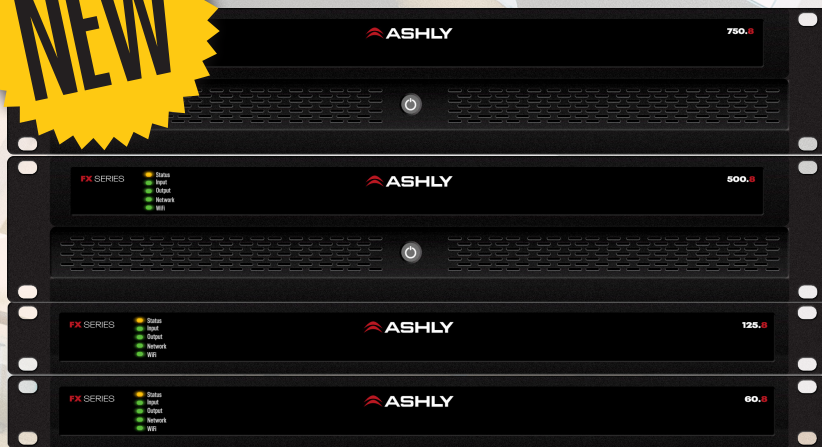


- ✓ INTELLIGENT DSP
- ✓ INTUITIVE SOFTWARE UI
- ✓ WIRELESS ACCESS



FX Series

Ashly Audio is proud to introduce the newest expansion to the FX Series: 8-channel amplifiers available in four distinct power levels—60W, 125W, 500W, and 750W per channel. Designed for high-density installations, these models streamline system design by delivering more channels in fewer rack spaces. Each unit features intelligent onboard DSP, flexible output modes for Low-Z and Hi-Z operation, and a built-in Wi-Fi hotspot for seamless browser-based configuration. Whether you're outfitting a large venue or a multi-zone commercial space, the FX 8-channel amplifiers offer unmatched scalability and control.

FX SERIES

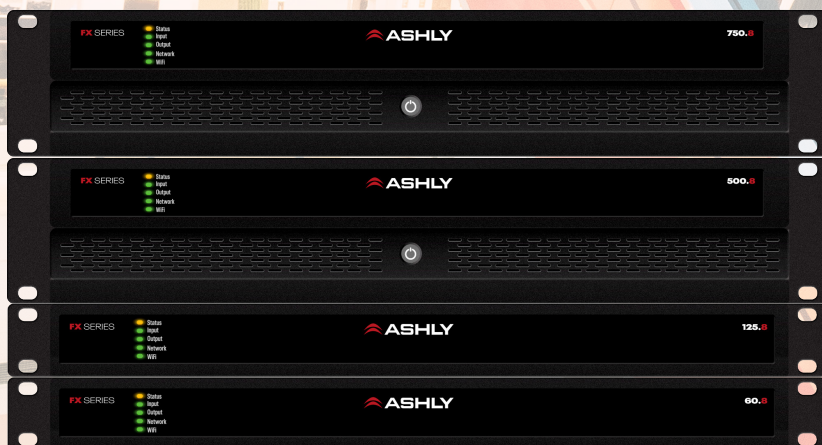

- ✓ INTELLIGENT DSP
- ✓ INTUITIVE SOFTWARE UI
- ✓ WIRELESS ACCESS



FX Series

The original FX Series set the standard for smart amplification. Available in 2- and 4-channel models, these amplifiers combine powerful onboard DSP with an intuitive browser-based interface, making setup and tuning fast and efficient. With built-in Wi-Fi for convenient control and flexible output modes supporting both Low-Z and Hi-Z loads, the FX Series is engineered for versatility. Whether you're managing a small venue or a distributed audio system, FX amplifiers deliver reliable performance and intelligent control.

FXD SERIES



The FXD Series brings the power and flexibility of the FX platform into the world of networked audio. With Dante-enabled 2-, 4-, and 8-channel configurations, FXD amplifiers provide 4x4 Dante I/O for high-quality, low-latency audio distribution across complex systems. Ideal for installations requiring long-distance signal routing, FXD models retain all the core FX features—intelligent DSP, browser-based UI, and built-in Wi-Fi—while adding the convenience and scalability of Dante AoIP. It's the perfect solution for modern, networked audio environments.

NEW



- ✓ WE SPEAK DANTE
- ✓ INTUITIVE SOFTWARE UI
- ✓ WIRELESS ACCESS



FX Series

FA SERIES

Compact, efficient, and powerful—the FA Series is built for straightforward amplification needs. With no DSP and direct 70V/100V output, these amplifiers are ideal for applications where simplicity and reliability are key. Available in half-rack and 1RU models, the FA Series features dynamic power sharing and active silent cooling, ensuring optimal performance in tight spaces. When you need concentrated power without the complexity, the FA Series delivers.



- ✓ CONCENTRATED POWER
- ✓ DYNAMIC POWER SHARING
- ✓ ACTIVE SILENT COOLING



FA Series

SPECIFICATIONS

Model	Channels	2 Ohm	4 Ohm	8 Ohm	70V	100V	DSP	Dante I/O	Frequency Response	Unit Dimensions (Inches, LxWxH)	Unit Weight
FA125.2	2	n/a	2 x 125W	2 x 125W	2 x 125W	2 x 125W	No	No	20 Hz - 20 kHz (+0/-0.5 dB (8 Ω load 3dB below rated power))	10.32 x 8.66 x 1.75	3.55
FA125.4	4	n/a	4 x 125W	4 x 125W	4 x 125W	4 x 125W				13.3 x 8.66 x 1.75	5.36
FA250.4	4	n/a	4 x 250W	4 x 250W	4 x 250W	4 x 250W				11.54 x 17.33 x 1.75	7.9

Model	Channels	2 Ohm	4 Ohm	8 Ohm	70V	100V	DSP	Dante I/O	Frequency Response	Unit Dimensions (Inches, LxWxH)	Unit Weight
FX60.2	2	n/a	2 x 60W	2 x 60W	1 x 120W (bridged)	1 x 120W (bridged)	Yes	No	20 Hz - 20 kHz (+0/-0.5 dB (8 Ω load 3dB below rated power))	8.19 x 8.66 x 1.75	4.4
FX60.4	4	n/a	4 x 60W	4 x 60W	2 x 120W (bridged)	2 x 120W (bridged)				8.19 x 8.66 x 1.75	4.4
FX60.8	8	n/a	8 x 60W	8 x 60W	4 x 120W (bridged)	4 x 120W (bridged)				12.6 x 19 x 1.75	7.7
FX125.2	2	n/a	2 x 125W	2 x 125W	1 x 250W (bridged)	1 x 250W (bridged)				11.65 x 8.66 x 1.75	6.2
FX125.4	4	n/a	4 x 125W	4 x 125W	2 x 250W (bridged)	2 x 250W (bridged)				11.65 x 8.66 x 1.75	6.2
FX125.8	8	n/a	8 x 125W	8 x 125W	4 x 250W (bridged)	4 x 250W (bridged)				12.6 x 19 x 1.75	8.4
FX500.2	2	2 x 500W	2 x 500W	2 x 250W	1 x 1000W (bridged)	1 x 1000W (bridged)				12.6 x 19 x 3.5	16.5
FX500.4	4	4 x 500W	4 x 500W	4 x 250W	2 x 1000W (bridged)	2 x 1000W (bridged)				12.6 x 19 x 3.5	16.5
FX500.8	8	8 x 500W	8 x 500W	8 x 250W	4 x 1000W (bridged)	4 x 1000W (bridged)				16.3 x 19 x 3.5	25.6
FX750.2	2	2 x 750W	2 x 750W	2 x 400W	1 x 1200W (bridged)	1 x 1500W (bridged)				12.6 x 19 x 3.5	16.5
FX750.4	4	4 x 750W	4 x 750W	4 x 400W	2 x 1200W (bridged)	2 x 1500W (bridged)				12.6 x 19 x 3.5	16.5
FX750.8	8	8 x 750W	8 x 750W	8 x 400W	4 x 1200W (bridged)	4 x 1500W (bridged)				16.3 x 19 x 3.5	25.6

Model	Channels	2 Ohm	4 Ohm	8 Ohm	70V	100V	DSP	Dante I/O	Frequency Response	Unit Dimensions (Inches, LxWxH)	Unit Weight
FXD60.2	2	n/a	2 x 60W	2 x 60W	1 x 120W (bridged)	1 x 120W (bridged)	Yes	Yes	20 Hz - 20 kHz (+0/-0.5 dB (8 Ω load 3dB below rated power))	8.19 x 8.66 x 1.75	4.4
FXD60.4	4	n/a	4 x 60W	4 x 60W	2 x 120W (bridged)	2 x 120W (bridged)				8.19 x 8.66 x 1.75	4.4
FXD60.8	8	n/a	8 x 60W	8 x 60W	4 x 120W (bridged)	4 x 120W (bridged)				12.6 x 19 x 1.75	7.7
FXD125.2	2	n/a	2 x 125W	2 x 125W	1 x 250W (bridged)	1 x 250W (bridged)				11.65 x 8.66 x 1.75	6.2
FXD125.4	4	n/a	4 x 125W	4 x 125W	2 x 250W (bridged)	2 x 250W (bridged)				11.65 x 8.66 x 1.75	6.2
FXD125.8	8	n/a	8 x 125W	8 x 125W	4 x 250W (bridged)	4 x 250W (bridged)				12.6 x 19 x 1.75	8.4
FXD500.2	2	2 x 500W	2 x 500W	2 x 250W	1 x 1000W (bridged)	1 x 1000W (bridged)				12.6 x 19 x 3.5	16.5
FXD500.4	4	4 x 500W	4 x 500W	4 x 250W	2 x 1000W (bridged)	2 x 1000W (bridged)				12.6 x 19 x 3.5	16.5
FXD500.8	8	8 x 500W	8 x 500W	8 x 250W	4 x 1000W (bridged)	4 x 1000W (bridged)				16.3 x 19 x 3.5	25.6
FXD750.2	2	2 x 750W	2 x 750W	2 x 400W	1 x 1200W (bridged)	1 x 1500W (bridged)				12.6 x 19 x 3.5	16.5
FXD750.4	4	4 x 750W	4 x 750W	4 x 400W	2 x 1200W (bridged)	2 x 1500W (bridged)				12.6 x 19 x 3.5	16.5
FXD750.8	8	8 x 750W	8 x 750W	8 x 400W	4 x 1200W (bridged)	4 x 1500W (bridged)				16.3 x 19 x 3.5	25.6



ashly.com

Ashly Audio, Inc. • 847 Holt Road • Webster, NY
USA • US toll-free +1.585.872.0010
Fax +1.585.872.0739 • Sales@Ashly.com



An **exertis** | JAM business