



WR-1.5 Remote Control

The WR-1.5 combines the level control capability of the WR-1 and the preset recall capability of the WR-2. A single potentiometer and four position rotary switch offer independent control of level and preset recall, and can be wired to the same or different hosting devices.

Compatible Ashly products include:

- ne24.24M
- NE 800, 1600, and 2400 two-channel power amplifiers *
- NE 4250 and 8250 multi-channel power amplifiers (with DSP)
- NE 8800, 4800, and 4400 DSP processors (using logic I/O)
- PEMA™ power amplifiers
- nXe and nXp power amplifiers


** Remote level control only, no preset recall*

Power and mounting - The WR-1.5 is a passive controller and thus requires no power other than the +5VDC provided by the hosting unit for level control. The WR-1.5 mounts to a standard US electrical wall box. Ashly recommends earth grounding the WR-1.5 frame at the point of installation to avoid static discharge into the host device.



Remote Level Control - The WR-1.5 connects to the host unit's remote level control pins as shown below. In some devices, the CV input may need to be assigned its function in Protea^{ne} Software using a remote level control function, found in or plugged into the DSP section.

Preset Recall - The five preset recall wires connect to the host unit's preset recall or logic I/O connector, if available*. The four switch positions can correspond directly to the first four numbered presets stored in the host unit's internal memory, or may be assigned a logic I/O function in some units.

Labels - On the WR-1.5 only, windows are provided for level and preset labels. Units ship from the factory with "Level" and "1-4" labels installed, but they can be easily replaced (see below) with a user-editable label document available on the Ashly website under Downloads>Application Notes for the WR-1.5.

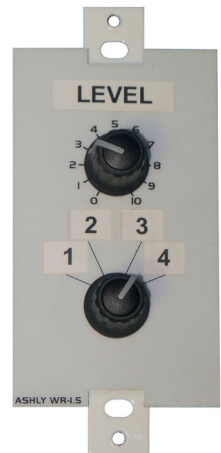

Wiring a WR-1.5 to the Host Unit

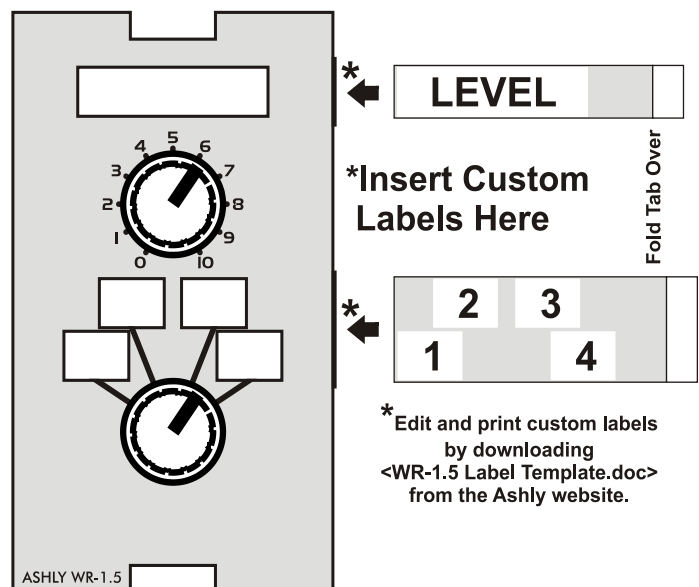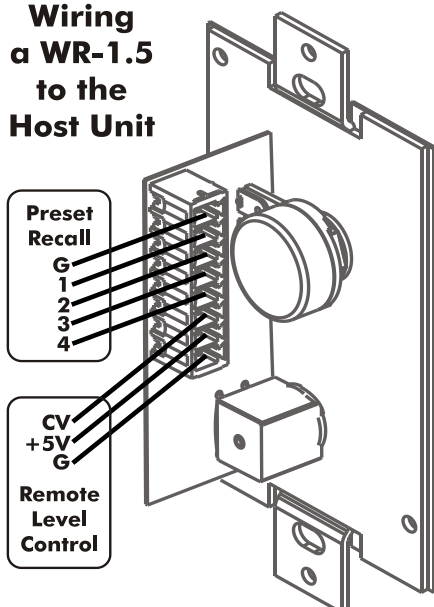

* Edit and print custom labels
by downloading
<WR-1.5 Label Template.doc>
from the Ashly website.

LIMITED WARRANTY (USA ONLY)

For Customers outside of the United States, please contact the distributor or dealer from whom the unit was originally purchased. For units purchased in the USA, warranty service for this unit shall be provided by ASHLY AUDIO, INC. in accordance with the following warranty statement.

ASHLY AUDIO, INC. warrants to the owner of this product that it will be free from defects in workmanship and materials for a period of FIVE years from the original date of purchase, with the exception of certain touch-screen displays and motorized faders for which the warranty extends THREE years from the original date of purchase, and ONE year from the original date of purchase for Ashly EXP products. Ashly Audio Inc. will, at its discretion and at no charge, either repair or replace any defective product or component upon prepaid delivery of the item to Ashly Audio Inc. service department. All warranty claims and returns of product must be accompanied by proof of the original date of purchase in the form of a valid sales receipt. This warranty confers specific legal rights, and additional rights pertaining to repair or replacement may vary by state.

WARRANTY EXCLUSIONS:

- 1) This warranty does not apply to damage resulting from misuse, neglect, improper installation, unauthorized modifications, or operation outside the product's intended use (failure to follow instructions in the operator's manual)
- 2) The warranty excludes defects or damages caused by external factors, including but not limited to accidents, environmental conditions, power surges or improper handling.
- 3) This warranty does not cover normal wear and tear, cosmetic damage, or consumable components that are expected to degrade over time.
- 4) The warranty does not extend to products that have been altered, repaired, or serviced by any party not authorized by the manufacturer.
- 5) Any damage arising from the use of incompatible accessories, attachments, or electrical supplies is excluded from coverage.
- 6) This warranty does not apply to equipment that has been subjected to installation related damage, improper storage, or transportation related impacts incurred during consumer-initiated transport after the product has been originally received.

This warranty is void if the serial number is altered, defaced, or removed. ASHLY AUDIO, INC. reserves the right to make changes in design, or make additions to, or improvements upon, this product without any obligation to install the same components as those installed on previously manufactured products.

Ashly Audio reserves the right to assess a fee for shipping and handling, should a product be determined non-defective upon completion of testing and thorough evaluation, regardless of warranty status.

Handling and storage fees will accrue on any product for which payment is not remitted within the required timeframe, in accordance with applicable state regulations.

In accordance with applicable state laws, any product deemed abandoned, left unclaimed, uncollected, or without customer response beyond the specified holding period may be used, sold or disposed of at the discretion of Ashly Audio Inc.

To the extent permitted by applicable state law any implied warranties, including the implied warranty of merchantability and the implied warranty of fitness for a particular purpose, are limited to the term of this written warranty. Some states do not allow limitations on the duration of implied warranties, so these limitations may not apply to you. Nothing in this warranty is intended to limit or exclude any rights or remedies available to the consumer under applicable state or federal warranty laws.

OBTAINING WARRANTY SERVICE INSIDE THE USA:

For warranty service in the United States, please visit the Ashly website, or [click here](#).

OBTAINING WARRANTY SERVICE OUTSIDE THE USA:

Please contact the authorized Ashly Distributor in your country. [Click here for a list of International Distributors](#).



ASHLY AUDIO 847 Holt Road Webster, NY 14580-9103, USA
Phone: (800) 828-6308 (585) 872-0010 Fax: (585) 872-0739 www.ashly.com

An **exertis** | **JAM** business

©2016 Ashly Audio. All rights reserved worldwide.

All features, specifications, and graphical representations are subject to change or improvement without notice.
All trademarks represented herein are the property of their respective owners.